

www.oliviaceramic.in

OLIVIA

Feel Beautiful



APPLICATION AREAS :



Paths and
Walkways



Beach
Establishments



Swimming Pools
and Adjacent
Area



Public parks
And Gardens



Terraces



Street
Furnishing



Parking Areas,
Transitable
Areas



Industrial
Areas

- 12 mm Thickness
- High Breaking Strength
- High M.O.R.
- 7 Colours Printing
- FLOTECH SURFACE

12 mm Thickness

FLOTECH SURFACE

www.oliviaceramic.in


OLIVIA

Feel Beautiful



Mountain
Rock

Heavy Duty
Parking Tiles



400x
400
MM

Just like Himalayan mountains act as barrier and protect the great indian plains and gives asthetic value to our mother land our floor tiles is reliable in all weather conditions and gives such a nice and asthetic look to your flooring area

Rustic

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




6006



6007



6008



6009





6007

Rustic

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



6010



6011



6012



6024





6011


Rustic

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



6013



6016



6017






6017

Rustic


400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

OLIVIA
Feel Beautiful




6018



6019



6020



6021





6018
6019




6020
6021

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



6025



6026



6027



6028





6025



6028

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



6031



6032



6033





6031

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



6034



6035



6036



6037






6036 / 6037


Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



6039



6040



6041



6043





6039



6043


Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



6044



6048



6046



6047







Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




6051



6049



6050






Rustic


400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

OLIVIA
Feel Beautiful




6052



6053



6054



6055





Rustic

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic


OLIVIA
Feel Beautiful



6058



6057



6056





Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



6059



6060







Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



7001



7002



7003



7004





7001
7002




7003
7004

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




7005



7006



7007






7007


Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




7010



7011



7013





7011

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



7014



7015



7016





7014
7015

Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



ETC-3115



ETC-3114



7024







Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




8003



8004




8005



8006



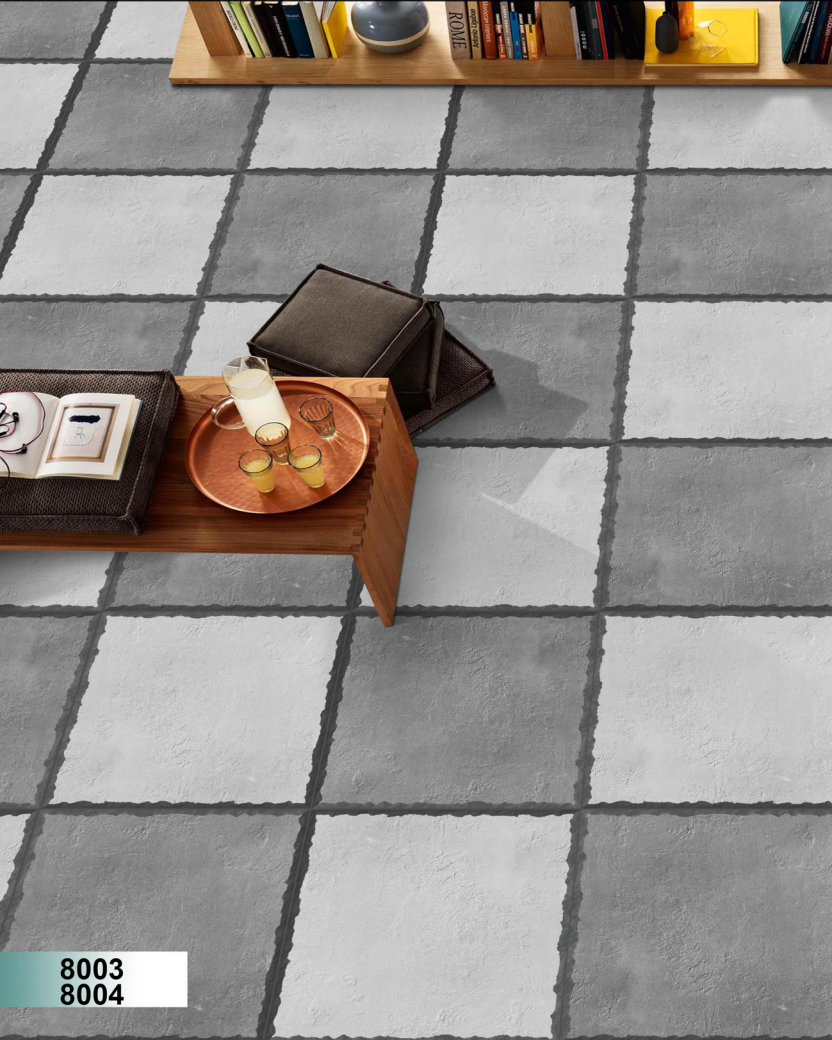

8003
8004



8005 / 8006


Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



8007



8008






8007 / 8008

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




8011



8012



8013





8013

Glazed outdoor tiles -40x40cm (Group Blb)

TECHNICAL SPECIFICATIONS

CHARACTERISTICS	TEST METHOD	INTERNATIONAL STD	OUR VALUE
		ISO 13006/EN 176 (GROUP Blb)	
DIMENSION & SURFACE QUALITY			
Deviation in Length	ISO-10545-2	±0.6%	±0.2%
Deviation in Thickness	ISO-10545-2	±5%	±4 %
Straightness of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	0.5 to 3.0 %	0.5 to 1.0 %
Breaking Strength	ISO-10545-11	>1100 N	>1300 N
Flexural Strength (Modulus of Rupture)	ISO-10545-4	>30 N/mm2	>35 N/mm2
Mohs Hardness	EN-101	Depends on the product	Min. 4
Resistance to Surface Abrasion	ISO-10545-7	Depends on the product	PEI IV
Slip Resistance	ISO-10545-17	Depends on the product	R9
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
CHEMICAL PROPERTIES			
Resistance to low concentrations of acids and alkalis	ISO-10545-13	No Damage	GLA
Resistance to high concentrations of acids and alkalis	ISO-10545-13	No Damage	GHA
Resistance to household chemicals	ISO-10545-16	No Damage	Minimum GB
Resistance to Staining	ISO-10545-14	No Damage	Class 3

Packing Details

SIZE (in mm)	Thickness	No. of Tiles Per Box	Coverage Area	Weight Per Box (Approx)
400x400mm	12 mm (Approx)	5 / box	0.80 sq. mtr.	18.5 kg