

www.oliviaceramic.in

OLIVIA

Feel Beautiful



APPLICATION AREAS :



Paths and
Walkways



Beach
Establishments



Swimming Pools
and Adjacent
Area



Public parks
And Gardens



Terraces



Street
Furnishing



Parking Areas,
Transitabl
Areas



Industrial
Areas

- 12 mm Thickness
- High Breaking Strength
- High M.O.R.
- 7 Colours Printing
- FLOTECH SURFACE

12 mm Thickness

FLOTECH SURFACE

www.oliviaceramic.in

OLIVIA

Feel Beautiful



Mountain
Rock

Heavy Duty
Parking Tiles



400x
400
MM

Just like Himalayan mountains act as barrier and protect the great indian plains and gives asthetic value to our mother land our floor tiles is reliable in all weather conditions and gives such a nice and asthetic look to your flooring area

Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5004



5005



5007





5004


Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




5008



5009



5010



5011





5008
5009




5010
5011


Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5012



5014



5015






5014


Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5016



5017



5021



5022






5022


Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5023



5024






5023


Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




5025_LT



5025_HL-1



5025_HL-2



5025_DK






5025


Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




5026_LT



5026_HL-1



5026_HL-2



5026_DK






5026


Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




5027_LT



5027_HL-1



5027_HL-2



5027_DK





5027


Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5030



5031



5032



5033





5030
5031



5032
5033

Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5034



5035



5036



5037





5034
5035




5036
5037


Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5049



5050






5049
5050

Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



5056




5059



5025_LT



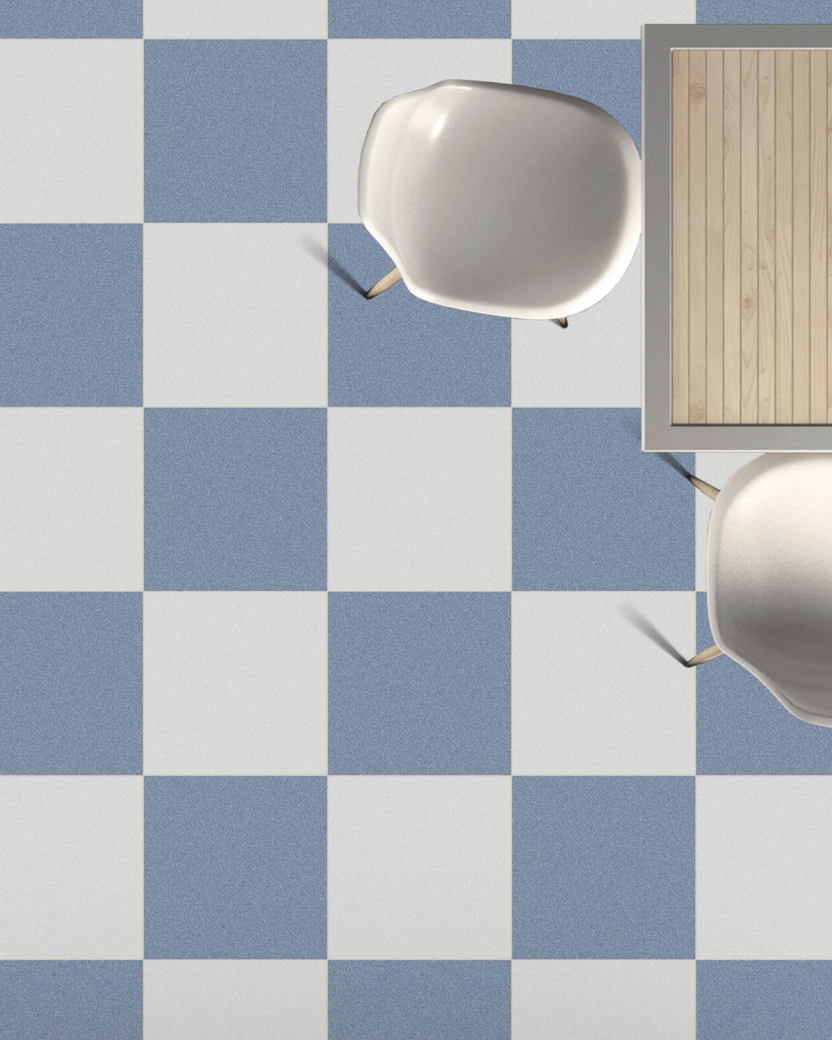

Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5058



5060



5066



5067






5058 / 5060


Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




5071



5074



5075



5077





5074

Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5078



5079



5081



5082





5078 / 5079


Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




5502




5503



5504



5505






5502 / 5503


Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5506



5508



5509



5505






5509 / 5503

Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




5510



5511



5512



5514






5512


Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




5515



5516



5517



5518





5516

Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5519





5519


Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5525



5526



5527






5526

Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




5528



5529



5530



5531





5528



5531


Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



5532



5533



5534






5532


Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5541



5542





Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




ETC-1012



ETC-91014




ETC-91013



5540




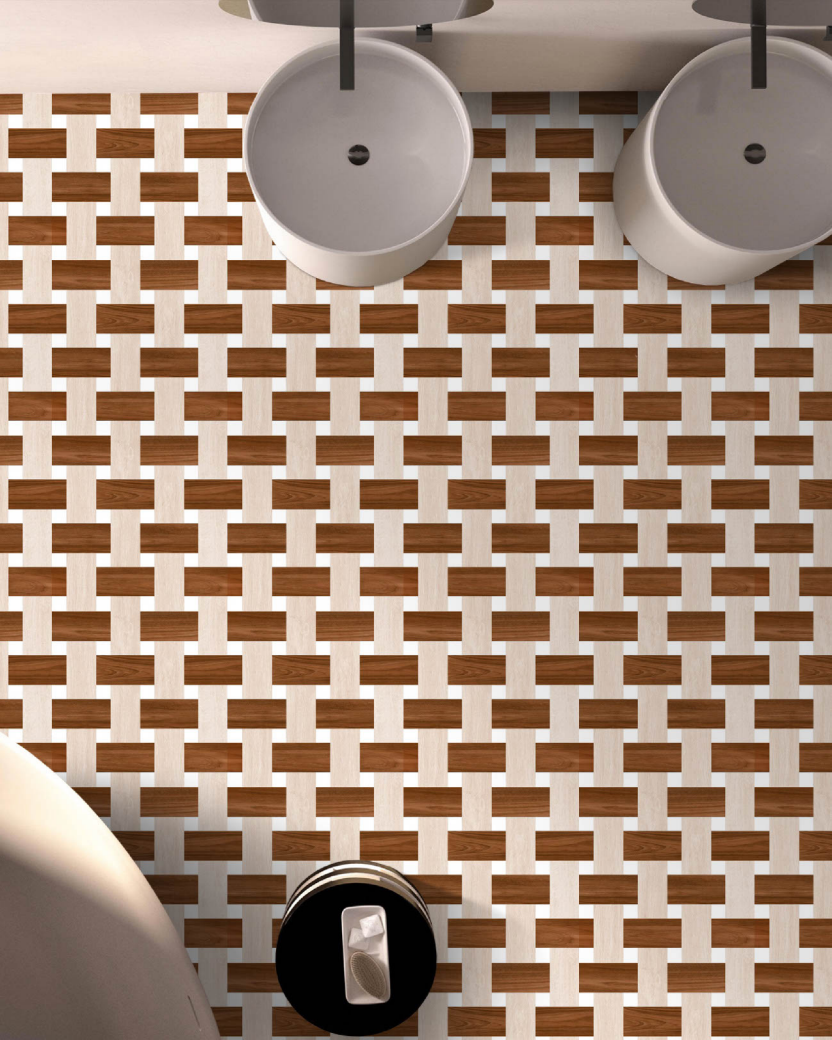

Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




5543



5544



5545







Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5547



5548





Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



5549



5550



5551





Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



5552



5553



5554






Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



ETC-1011



ETC-1017



ETC-1043






Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




ETC-1001



5539



CV-9145-D



CV-9145-L





Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




ETC-4011



ETC-4012




5556



5557




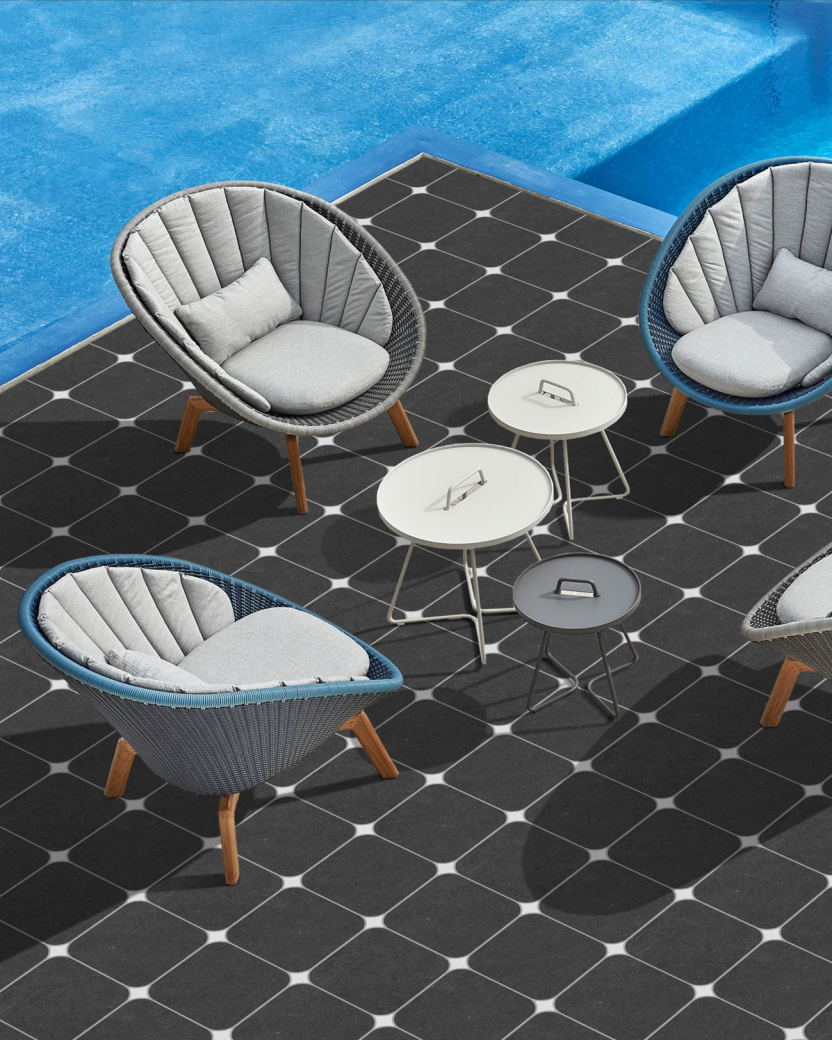


Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




5558



5559



5560



5565






Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




SW-1



SW-2




SW-3



SW-4



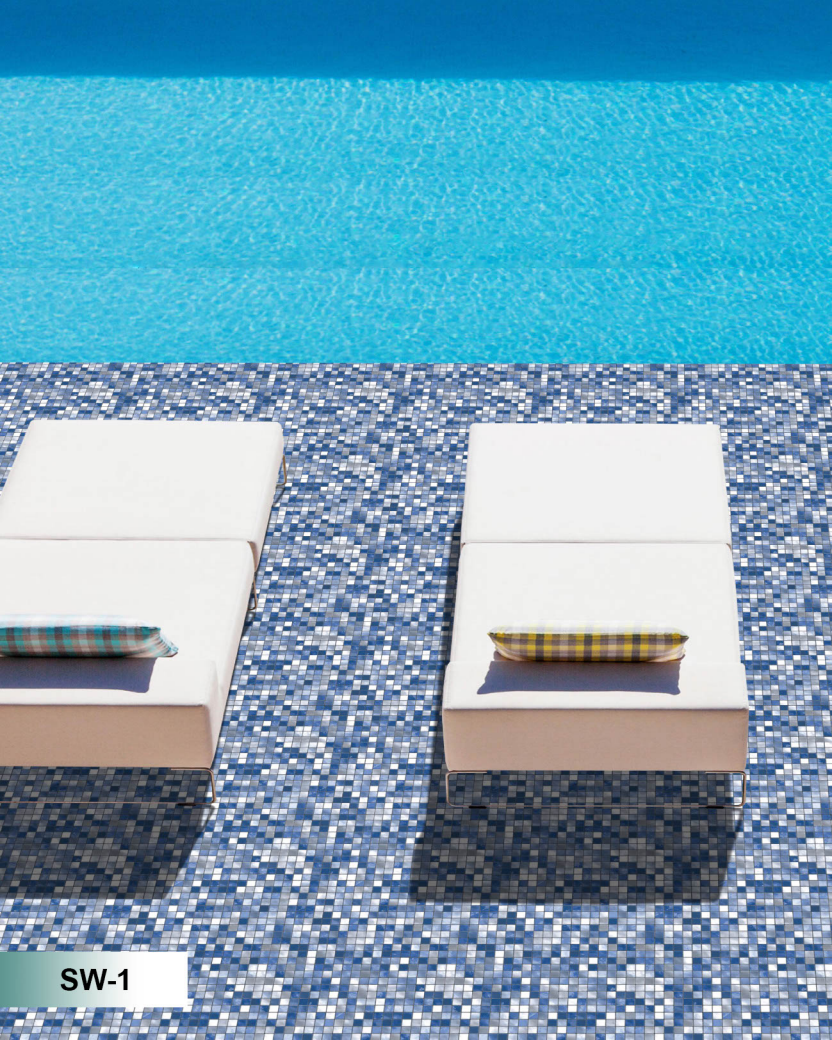


SW-1


Plain

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



SW-5



SW-6





SW-5

Glazed outdoor tiles -40x40cm (Group Blb)

TECHNICAL SPECIFICATIONS

CHARACTERISTICS	TEST METHOD	INTERNATIONAL STD	OUR VALUE
		ISO 13006/EN 176 (GROUP Blb)	
DIMENSION & SURFACE QUALITY			
Deviation in Length	ISO-10545-2	±0.6%	±0.2%
Deviation in Thickness	ISO-10545-2	±5%	±4 %
Straightness of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	0.5 to 3.0 %	0.5 to 1.0 %
Breaking Strength	ISO-10545-11	>1100 N	>1300 N
Flexural Strength (Modulus of Rupture)	ISO-10545-4	>30 N/mm2	>35 N/mm2
Mohs Hardness	EN-101	Depends on the product	Min. 4
Resistance to Surface Abrasion	ISO-10545-7	Depends on the product	PEI IV
Slip Resistance	ISO-10545-17	Depends on the product	R9
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
CHEMICAL PROPERTIES			
Resistance to low concentrations of acids and alkalis	ISO-10545-13	No Damage	GLA
Resistance to high concentrations of acids and alkalis	ISO-10545-13	No Damage	GHA
Resistance to household chemicals	ISO-10545-16	No Damage	Minimum GB
Resistance to Staining	ISO-10545-14	No Damage	Class 3

Packing Details

SIZE (in mm)	Thickness	No. of Tiles Per Box	Coverage Area	Weight Per Box (Approx)
400x400mm	12 mm (Approx)	5 / box	0.80 sq. mtr.	18.5 kg