

www.oliviaceramic.in

OLIVIA

Feel Beautiful



APPLICATION AREAS :



Paths and
Walkways



Beach
Establishments



Swimming Pools
and Adjacent
Area



Public parks
And Gardens



Terraces



Street
Furnishing



Parking Areas,
Transitable
Areas



Industrial
Areas

- 12 mm Thickness
- High Breaking Strength
- High M.O.R.
- 7 Colours Printing
- FLOTECH SURFACE

12 mm Thickness

FLOTECH SURFACE

www.oliviaceramic.in


OLIVIA

Feel Beautiful



Mountain
Rock

Heavy Duty
Parking Tiles



400x
400
MM

Just like Himalayan mountains act as barrier and protect the great indian plains and gives asthetic value to our mother land our floor tiles is reliable in all weather conditions and gives such a nice and asthetic look to your flooring area

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



1101



1102



1107






1101


Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



1106



1108



ETC-2515



ETC-2518



Press  to exit full screen

1106


Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



1113



1114



1115



1122





1113


Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



1201



1202



1205



1206






1202

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



ETC-2902



ETC-11021



ETC-2914






Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




1301



1303



1305



1306






1303


Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




1307



1309



ETC-8002



ETC-8011






1309


Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



1501



1502






1501

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




1505



1508



1509



1511





1509


Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



ETC-7701




ETC-7702



ETC-7704




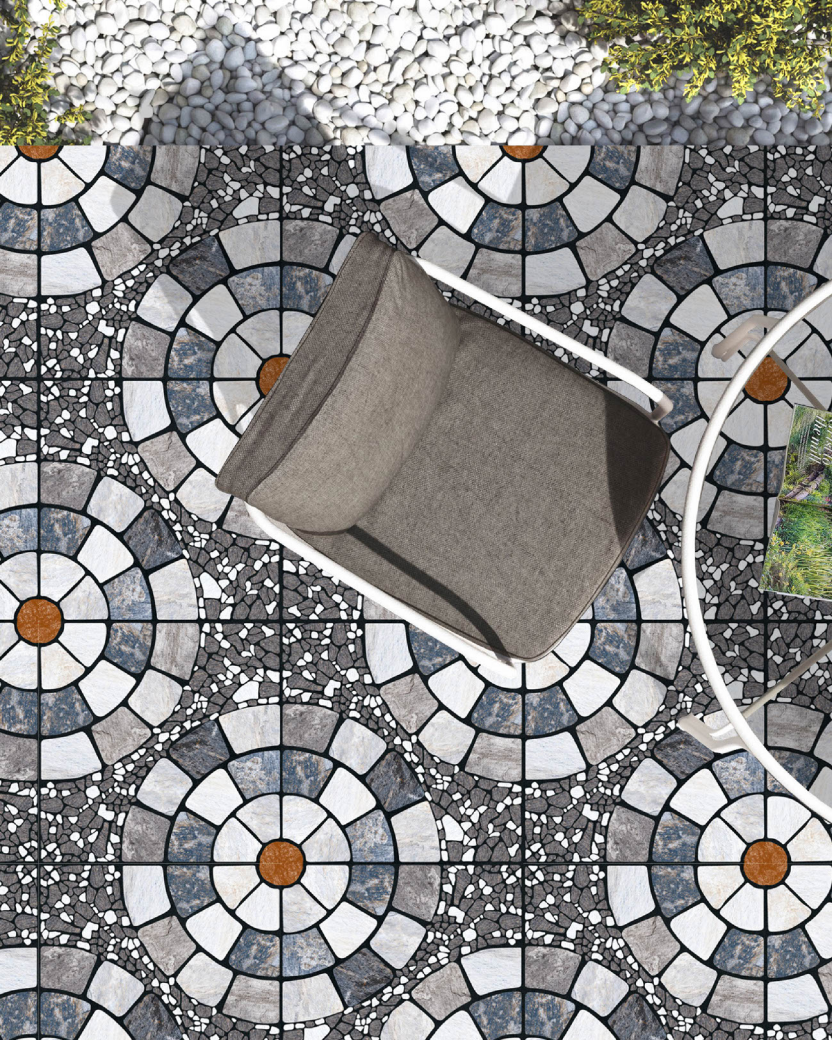

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




1701



1703



1705



1706





1703


Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



1709



1710



1712



1716



1712


Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




ETC-7512



1717



1718



1719






Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



1801



1803



1804



1805





1804

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




1806



1809



1810



1812





1809

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



1816



1817






Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




1901



1903



1905



1906






1906


Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



1908



1909



1910



1915






1909

Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic



1911



1912



1913



1914






Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



2001



2002



2005



2007






2005

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic




2009



2011



2013



2016






2011


Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic




2014



2015



2017



2018







Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



2019



2020





Glazed outdoor tiles -40x40cm (Group Blb)

TECHNICAL SPECIFICATIONS

CHARACTERISTICS	TEST METHOD	INTERNATIONAL STD	OUR VALUE
		ISO 13006/EN 176 (GROUP Blb)	
DIMENSION & SURFACE QUALITY			
Deviation in Length	ISO-10545-2	±0.6%	±0.2%
Deviation in Thickness	ISO-10545-2	±5%	±4 %
Straightness of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THREMLAL PROPERTIES			
Water Absorption	ISO-10545-3	0.5 to 3.0 %	0.5 to 1.0 %
Breaking Strength	ISO-10545-11	>1100 N	>1300 N
Flexural Strength (Modulus of Rupture)	ISO-10545-4	>30 N/mm2	>35 N/mm2
Mohs Hardness	EN-101	Depends on the product	Min. 4
Resistance to Surface Abrasion	ISO-10545-7	Depends on the product	PEI IV
Slip Resistance	ISO-10545-17	Depends on the product	R9
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
CHEMICAL PROPERTIES			
Resistance to low concentrations of acids and alkalis	ISO-10545-13	No Damage	GLA
Resistance to high concentrations of acids and alkalis	ISO-10545-13	No Damage	GHA
Resistance to household chemicals	ISO-10545-16	No Damage	Minimum GB
Resistance to Staining	ISO-10545-14	No Damage	Class 3

Packing Details

SIZE (in mm)	Thickness	No. of Tiles Per Box	Coverage Area	Weight Per Box (Approx)
400x400mm	12 mm (Approx)	5 / box	0.80 sq. mtr.	18.5 kg