

www.oliviaceramic.in

OLIVIA

Feel Beautiful



APPLICATION AREAS :



Paths and
Walkways



Beach
Establishments



Swimming Pools
and Adjacent
Area



Public parks
And Gardens



Terraces



Street
Furnishing



Parking Areas,
Transitable
Areas



Industrial
Areas

- 12 mm Thickness
- High Breaking Strength
- High M.O.R.
- 7 Colours Printing
- FLOTECH SURFACE

12 mm Thickness

FLOTECH SURFACE

www.oliviaceramic.in


OLIVIA

Feel Beautiful



Mountain
Rock

Heavy Duty
Parking Tiles



400x
400
MM

Just like Himalayan mountains act as barrier and protect the great indian plains and gives asthetic value to our mother land our floor tiles is reliable in all weather conditions and gives such a nice and asthetic look to your flooring area

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



1814_4-pic-Random






1814

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

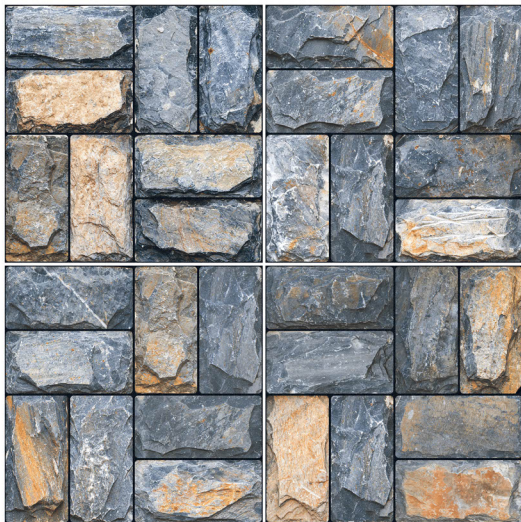

1815_4-pic-Random






1815

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

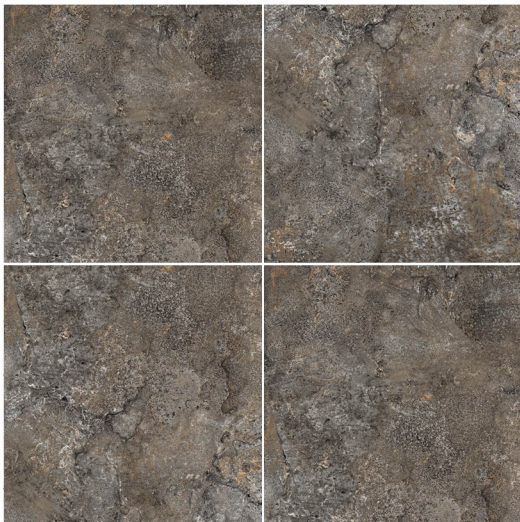

ETC-3324





Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



ETC-3325








Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

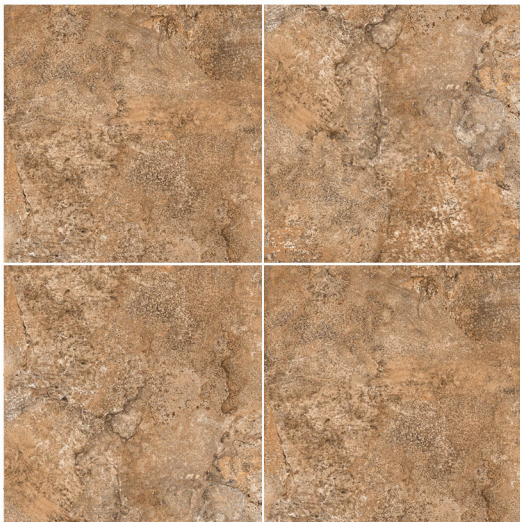

ETC-3326





Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



ETC-3327







Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



5041_6-pic-Random●

Look




5041

Plain

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

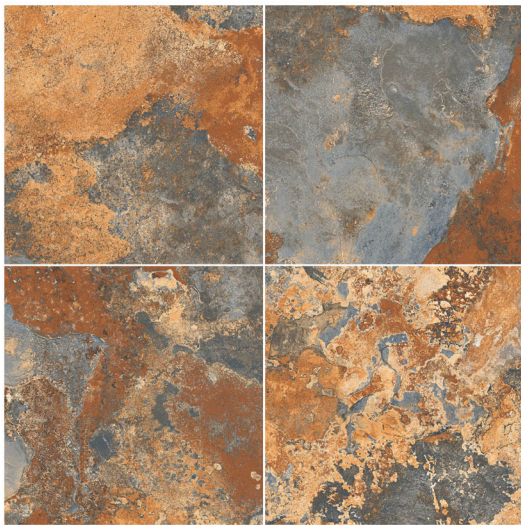

5048_10-pic-Random●




5048


Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

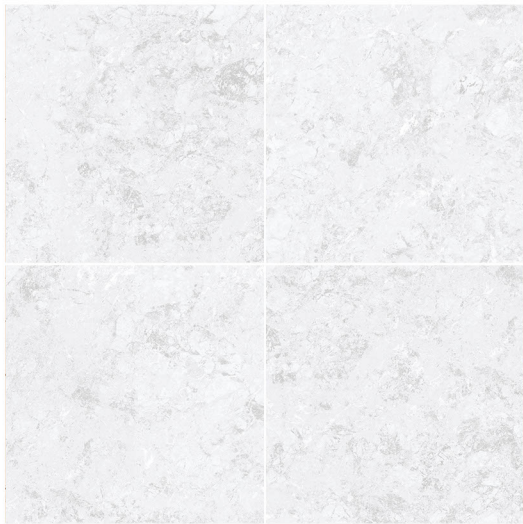

ETC-5561






Punch

400x400 MM Parking tiles


● Plain ★ Punch ▲ Rustic

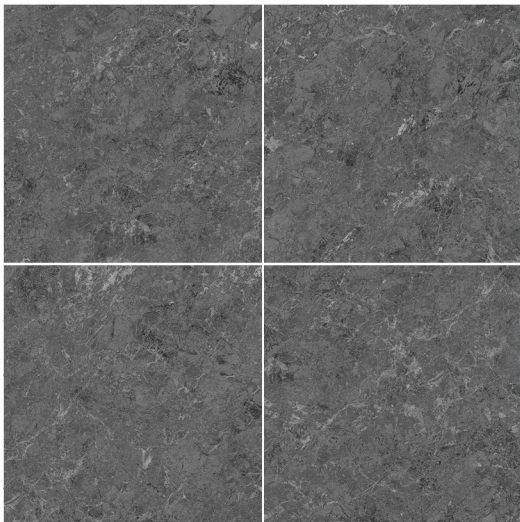

ETC-5562







Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



ETC-5563






Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

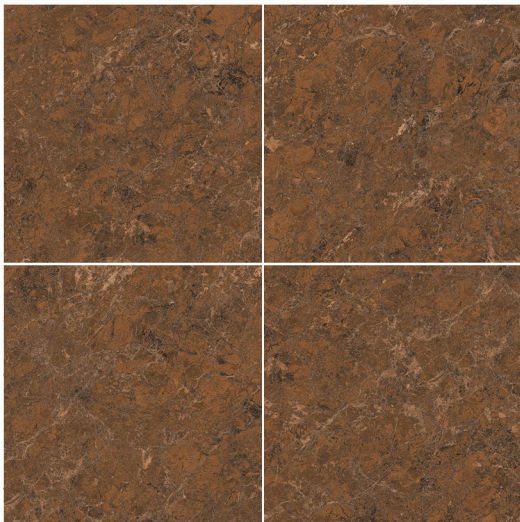

ETC-5564








Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

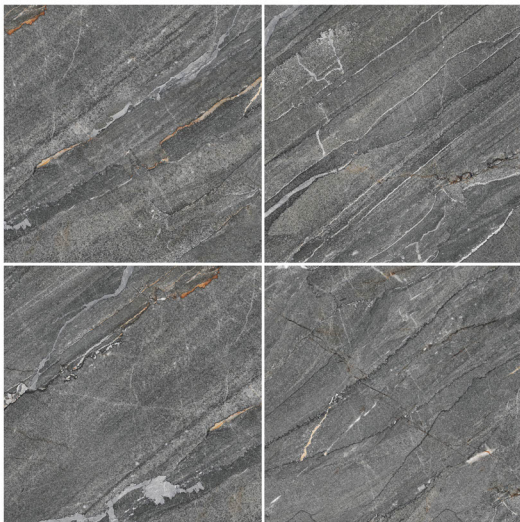

7017_6-pic-Random ★




7017

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

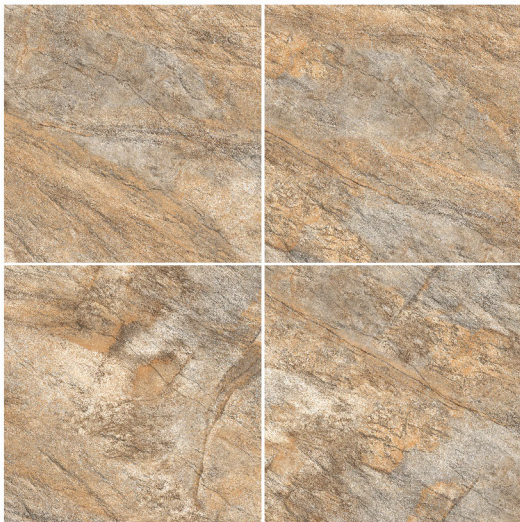

7018_6-pic-Random ★



7018

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



8014_3-pic-Random





8014

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



8015_4-pic-Random






8015

Punch


400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

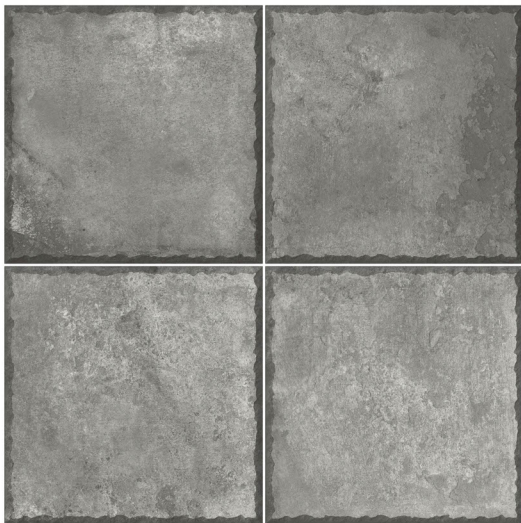

8019_4-pic-Random



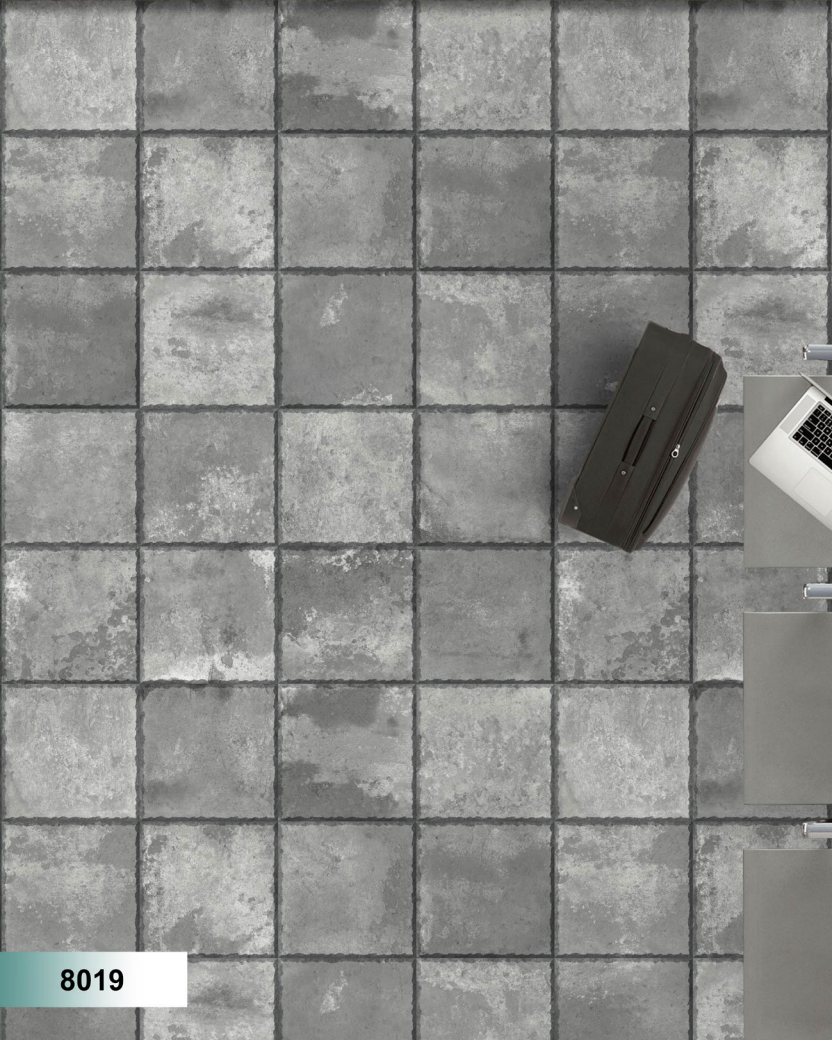

8019

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



8021_DK_4-pic-Random





8021 DK

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



8021 LT 4-pic-Random





8021 LT

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



8022_DK_4-pic-Random





8022 DK

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



8022_LT_4-pic-Random





8022 LT

Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



ETC-1063





Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



ETC-1064








Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic

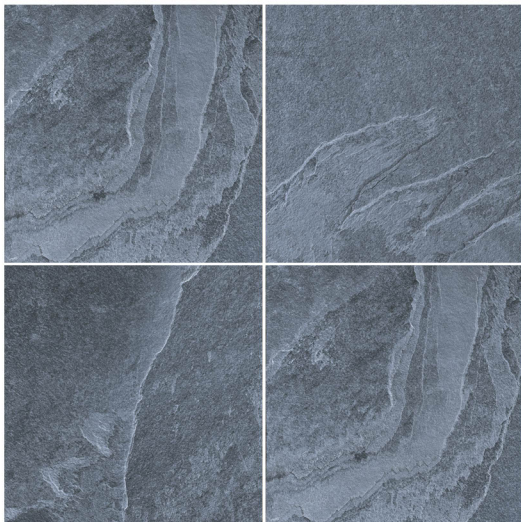

ETC-3126





Punch

400x400 MM Parking tiles

● Plain ★ Punch ▲ Rustic



ETC-3127







Glazed outdoor tiles -40x40cm (Group Blb)

TECHNICAL SPECIFICATIONS

CHARACTERISTICS	TEST METHOD	INTERNATIONAL STD	OUR VALUE
		ISO 13006/EN 176 (GROUP Blb)	
DIMENSION & SURFACE QUALITY			
Deviation in Length	ISO-10545-2	±0.6%	±0.2%
Deviation in Thickness	ISO-10545-2	±5%	±4 %
Straightness of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	0.5 to 3.0 %	0.5 to 1.0 %
Breaking Strength	ISO-10545-11	>1100 N	>1300 N
Flexural Strength (Modulus of Rupture)	ISO-10545-4	>30 N/mm2	>35 N/mm2
Mohs Hardness	EN-101	Depends on the product	Min. 4
Resistance to Surface Abrasion	ISO-10545-7	Depends on the product	PEI IV
Slip Resistance	ISO-10545-17	Depends on the product	R9
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
CHEMICAL PROPERTIES			
Resistance to low concentrations of acids and alkalis	ISO-10545-13	No Damage	GLA
Resistance to high concentrations of acids and alkalis	ISO-10545-13	No Damage	GHA
Resistance to household chemicals	ISO-10545-16	No Damage	Minimum GB
Resistance to Staining	ISO-10545-14	No Damage	Class 3

Packing Details

SIZE (in mm)	Thickness	No. of Tiles Per Box	Coverage Area	Weight Per Box (Approx)
400x400mm	12 mm (Approx)	5 / box	0.80 sq. mtr.	18.5 kg